


PRODUCT CATALOG 2022

Find us:

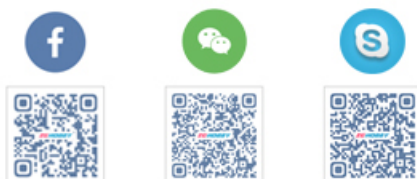


ZG Hobby established 2013, location in DongGuang city of China. We are a professional produced silicone wire, Connectors and RC accessories manufacturer. Specialized in solve Lipo, Charger, Motor and Drone connection problems. we are capable of provide safe and fair cost goods for customer, If you have any requirement, Please contact us (info@zghobby.com).


Contents

**Connectors & Adapters**
3-9

Gold plate, injection connectors & Battery adapters

**Servo Wires**
10-15

JR Futaba universal wires & Balance wires

**Charge Lead**
16-34


Charge wires & Extension wires

**Wires**
35-37

Silicone wires & PVC wires & Parallel wires

**Lipo Bag**
38-38

Fireproof & Waterproof charging bags

**Other Accessories**
39-48Hanging belts / Bandages / Connection fasteners / Clips
Peaked cap / Commemorative coins

ZG1001



2.0mm gold plated connector
male & female
Body:Brass
Spring:Beryllium copper
Weight:0.63g/set

ZG1002



2.0mm gold plated connector
male & female
Body:Brass
Spring:Beryllium copper
Weight:0.47g/set

ZG1003



2.0mm gold plated connector
male & female
Body:Brass
Spring:Beryllium copper
Weight:1g/set

ZG1004



3.0mm gold plated connector
male & female
Body:Brass
Spring:Beryllium copper
Weight:0.95g/set

ZG1005



3.5mm gold plated connector
male & female
Body:Brass
Weight:1.5g/set

ZG1006



3.5mm gold plated connector
male & female
Body:Brass
Spring:Beryllium copper
Weight:1.4g/set

ZG1007



4.0mm gold plated connector
male & female
Body:Brass
Spring:Beryllium copper
Weight:2.78g/set

ZG1008



4.0mm gold plated connector
male & female
Body:Brass
Spring:Beryllium copper
Weight:2.21g/set

ZG1009



4.0mm gold plated connector
male & female
Body:Brass
Spring:Beryllium copper
Weight:2.3g/set

ZG1010



4.0mm gold plated connector
male & female
Body:Brass
Spring:Beryllium copper
Weight:2.5g/set

ZG1011

4.0mm gold plated connector
male & female
Body:Brass
Spring:Beryllium copper
Weight: 2.86g/set

ZG1012

4.0mm gold plated connector
male
Body:Brass
Weight:1.8g/pc

ZG1013

4/5mm gold plated connector
male
Body:Brass
Weight:2.3g/pc

ZG1014

5.5mm gold plated connector
male & female
Body:Brass
Weight:5g/set

ZG1015

6.0mm gold plated connector
male & female
Body:Brass
Weight:3.1g/set

ZG1016

8.0mm gold plated connector
male & female
Body:Brass
Weight:11.3g/set

ZG1017

2.0mm gold plated connector
with red housing
Weight:1.24g/set

ZG1018

3.5mm gold plated connector
with red housing
Weight:2.19g/set

ZG1019

4.0mm gold plated connector
with red housing
Weight:4.2g/set
Max:OD3.9mm Cable

ZG1020

4.0mm gold plated connector
with red housing
Weight: 5g/set
Max:12AWG Cable
(OD4.2mm)

ZG1021

4.0mm gold plated connector
with red housing
Weight: 5.2g/set
Max:10AWG Cable
(OD5.0mm)

ZG1022

4.0 mm gold plated connector
Red & Black
Weight:11.7g/set

ZG1023

4.0 mm gold plated connector
Red & Black
Weight:5.93g/set

ZG1024

3.5mm * 3pairs with two
housing(symmetrical)
Weight:6.2g/set,

ZG1025

XT150 connector
Male & Female
Brass, PA66 Black
Weight:6.7g/set

ZG1026

AS150 connector
Male & Female
Brass, PA66 Black
Weight:7.1g/set

ZG1027

AS150 Sparkproof
Male & Female
Fireproof UL94 V2
Brass, PA66 Red
Weight:7.3g/pc

ZG1028

Deans connector
male & female
Weight:4.8g/set

ZG1029

New Deans connector
with ribs
male & female
Weight:4.8g/set

ZG1030

Non-slip Dean with Cap
Male & Female
Brass, PA66 Red
Weight:5.6g/set

ZG1031

EC3 connector
Male & Female
Brass, PA66 blue
Weight:4.7g/set

ZG1032

EC5 connector
Male & Female
Brass, PA66 blue
Weight:12.2g/set

ZG1033

Tamiya connector
Male & Female
Gold plating, PA66 white
Weight:4.5g/set

ZG1034

TRX connector
Male & Female
Brass, PA66 black
Weight:7.1g/set

ZG1035

XT30 connector
Male & Female
Brass, PA66 yellow
Weight:2.2g/set

ZG1036

XT60 connector
Male & Female
Brass, PA66 yellow
Weight:7.6g/set

ZG1037

XT60 with shield
Male & Female
Brass, PA66 yellow
Weight:7.5g/set

ZG1038

XT60PW Vertical solder
Male & Female
Brass, PA66 yellow
Weight:6.2g/set

ZG1039

XT60PM PCB soldered
Fireproof UL94-V0
Male & Female
Brass, PA66 yellow
Weight:6.5g/set

ZG1040

XT60W water proof
Male & Female
Brass, PA66 black
Weight:6.8g/set

ZG1041

MR30 with shield
Male & Female
Brass, PA66 yello & black
Weight:3.6g/set

ZG1042

MR60 with shield
Male & Female
Brass, PA66 yello & black
Weight:4.6g/set

ZG1043


MT60 with shield
Male & Female
Brass, PA66 yello
Weight:9.2g/set

ZG1044

XT90 connector
Male & Female
Brass, PA66 yello
Weight:13.6g/set

ZG1045


XT90H connector
Male & Female
Brass, PA66 yello
Weight:15.2g/set

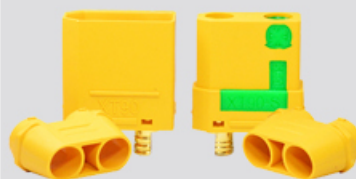ZG1046

XT90S Anti-spark high current
Male & Female
Brass, PA66 yello
Weight:16.6g/set

ZG1047

XT90(2+2)PB-M
Male & Female
PCB soldered, Fireproof
UL94-V0 with 2pin plugs
Brass, PA66 yello
Weight:14.2g/set

ZG1048

AS150U antispark connector
Male & Female
Brass, PA66 yello
Weight:12.6g/set

ZG1049

XT120(2+2) with 2 signal
pin connector
Male & Female
Brass, PA66 yello
Weight:38.9g/set

ZG1050

AS250 SH8.0-M/F
100A lipo battery connector
Male & Female
Brass, PA66 red / black
Weight:12.6g/set

ZG1501



F Deans to M Tamiya
Adapter
14AWG L=20MM
Shrink Tube(φ 16*40MM)

ZG1502



M Deans to F Tamiya
Adapter
14AWG L=20MM
Shrink Tube(φ 16*46MM)

ZG1503



M Deans to F XT60
Adapter
Shrink Tube(φ 16*24MM)

ZG1504



F Deans to M XT60
Adapter
Shrink Tube(φ 16*35MM)

ZG1505



F TRX to M XT60
Adapter
14AWG L=20MM
Shrink Tube(φ 16*52MM)

ZG1506



M TRX to F XT60
Adapter
14AWG L=20MM
Shrink Tube(φ 16*45MM)

ZG1507



F Deans to M TRX
Adapter
14AWG L=20MM
Shrink Tube(φ 16*49MM)

ZG1508



F Deans to M TRX
Adapter
14AWG L=20MM
Shrink Tube(φ 16*42MM)

ZG1509



M EC3 to F TRX
Adapter
14AWG L=20MM

ZG1510



M EC3 to F TRX
Adapter
14AWG L=20MM
Shrink Tube(φ 16*39MM)

ZG1511



M TRX to F Tamiya
Adapter
14AWG L=20MM
Shrink Tube(φ 16*50MM)

ZG1512



F TRX to M Tamiya
Adapter
14AWG L=20MM
Shrink Tube(φ 16*45MM)

ZG1513



M Deans to F EC3
Adapter
14AWG L=20MM
Shrink Tube(φ 16*40MM)

ZG1514



F Deans to M EC3
Adapter
14AWG L=20MM
Shrink Tube(φ 16*42MM)

ZG1515



F EC5 to M XT90
Adapter
Shrink Tube(φ 22*40MM)

ZG1516



F XT60 to M XT90
Adapter
Shrink Tube(φ 22*40MM)

ZG1517



M XT60 to F TRX
Adapter
Brass, PA66 yello

ZG1518



M XT60 to F Tamiya
Adapter
Brass, PA66 yello

ZG1519



M XT60 to F Deans
Adapter
Brass, PA66 yello

ZG1520



M XT60 to F EC3
Adapter
Brass, PA66 yello

ZG2001



- 2001-1** 15cm 26AWG Futaba extension leads, flat wire
- 2001-2** 30cm 26AWG Futaba extension leads, flat wire
- 2001-3** 45cm 26AWG Futaba extension leads, flat wire
- 2001-4** 60cm 26AWG Futaba extension leads, flat wire
- 2001-5** 90cm 26AWG Futaba extension leads, flat wire
- 2001-6** 15cm 22AWG Futaba extension leads, flat wire
- 2001-7** 30cm 22AWG Futaba extension leads, flat wire
- 2001-8** 45cm 22AWG Futaba extension leads, flat wire
- 2001-9** 60cm 22AWG Futaba extension leads, flat wire
- 2001-10** 90cm 22AWG Futaba extension leads, flat wire

ZG2002



- 2002-1** 15cm 26AWG JR extension leads, flat wire
- 2002-2** 30cm 26AWG JR extension leads, flat wire
- 2002-3** 45cm 26AWG JR extension leads, flat wire
- 2002-4** 60cm 26AWG JR extension leads, flat wire
- 2002-5** 90cm 26AWG JR extension leads, flat wire
- 2002-6** 15cm 22AWG JR extension leads, flat wire
- 2002-7** 30cm 22AWG JR extension leads, flat wire
- 2002-8** 45cm 22AWG JR extension leads, flat wire
- 2002-9** 60cm 22AWG JR extension leads, flat wire
- 2002-10** 90cm 22AWG JR extension leads, flat wire

ZG2003




- 2003-1** 15cm 26AWG Futaba extension leads, twisted wire
- 2003-2** 30cm 26AWG Futaba extension leads, twisted wire
- 2003-3** 45cm 26AWG Futaba extension leads, twisted wire
- 2003-4** 60cm 26AWG Futaba extension leads, twisted wire
- 2003-5** 90cm 26AWG Futaba extension leads, twisted wire
- 2003-6** 15cm 22AWG Futaba extension leads, twisted wire
- 2003-7** 30cm 22AWG Futaba extension leads, twisted wire
- 2003-8** 45cm 22AWG Futaba extension leads, twisted wire
- 2003-9** 60cm 22AWG Futaba extension leads, twisted wire
- 2003-10** 90cm 22AWG Futaba extension leads, twisted wire

ZG2004



- 2004-1** 15cm 26AWG JR extension leads, twisted wire
- 2004-2** 30cm 26AWG JR extension leads, twisted wire
- 2004-3** 45cm 26AWG JR extension leads, twisted wire
- 2004-4** 60cm 26AWG JR extension leads, twisted wire
- 2004-5** 90cm 26AWG JR extension leads, twisted wire
- 2004-6** 15cm 22AWG JR extension leads, twisted wire
- 2004-7** 30cm 22AWG JR extension leads, twisted wire
- 2004-8** 45cm 22AWG JR extension leads, twisted wire
- 2004-9** 60cm 22AWG JR extension leads, twisted wire
- 2004-10** 90cm 22AWG JR extension leads, twisted wire



ZG2005-1

30cm 26AWG Futaba male servo leads, twisted wire

ZG2005-2

30cm 22AWG Futaba male servo leads, twisted wire



ZG2006-1

30cm 26AWG Futaba female servo leads, twisted wire

ZG2006-2

30cm 22AWG Futaba female servo leads, twisted wire



ZG2007-1

30cm 26AWG JR male servo leads, twisted wire

ZG2007-2

30cm 22AWG JR male servo leads, twisted wire



ZG2008-1

30cm 26AWG JR female servo leads, twisted wire

ZG2008-2

30cm 22AWG JR female servo leads, twisted wire




ZG2009-1

30cm 26AWG JR male servo leads, flat wire

ZG2009-2

30cm 22AWG JR male servo leads, flat wire



ZG2010-1

30cm 26AWG JR female servo leads, flat wire

ZG2010-2

30cm 22AWG JR female servo leads, flat wire



ZG2011-1

30cm 26AWG Futaba male servo leads, flat wire

ZG2011-2

30cm 22AWG Futaba male servo leads, flat wire




ZG2012-1

30cm 26AWG Futaba female servo leads, flat wire

ZG2012-2

30cm 22AWG Futaba female servo leads, flat wire



ZG2013-1

20cm 26AWG Futaba male battery leads

ZG2013-2

20cm 22AWG Futaba male battery leads



ZG2014-1

20cm 26AWG Futaba female battery leads

ZG2014-2

20cm 22AWG Futaba female battery leads




ZG2015-1

20cm 26AWG JR male battery leads

ZG2015-2

20cm 22AWG JR male battery leads



ZG2016-1

20cm 26AWG JR female battery leads

ZG2016-2

20cm 22AWG JR female battery leads

ZG2017




- 2017-1 15cm 26AWG Futaba Y leads, twisted wire
- 2017-2 30cm 26AWG Futaba Y leads, twisted wire
- 2017-3 60cm 26AWG Futaba Y leads, twisted wire
- 2017-4 15cm 22AWG Futaba Y leads, twisted wire
- 2017-5 30cm 22AWG Futaba Y leads, twisted wire
- 2017-6 60cm 22AWG Futaba Y leads, twisted wire

ZG2018




- 2018-1 15cm 26AWG JR Y leads, twisted wire
- 2018-2 30cm 26AWG JR Y leads, twisted wire
- 2018-3 60cm 26AWG JR Y leads, twisted wire
- 2018-4 15cm 22AWG JR Y leads, twisted wire
- 2018-5 30cm 22AWG JR Y leads, twisted wire
- 2018-6 60cm 22AWG JR Y leads, twisted wire

ZG2019

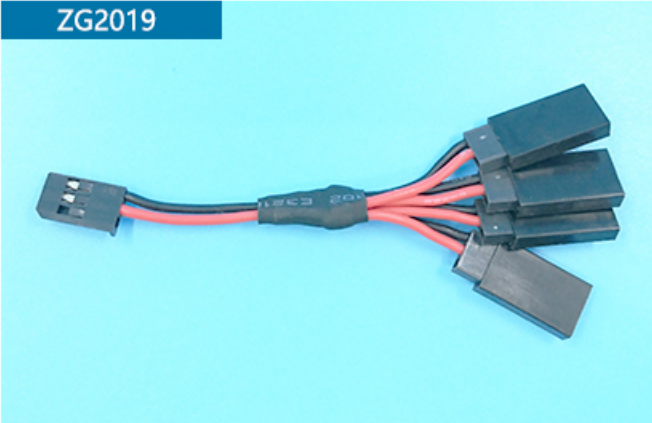

- 2019-1 75mm 24AWG RX Power Splitter Female Servo x 4
- 2019-2 75mm 26AWG RX Power Splitter Female Servo x 4
- 2018-3 150mm 24AWG RX Power Splitter Female Servo x 4
- 2018-4 150mm 24AWG RX Power Splitter Female Servo x 4


ZG2020

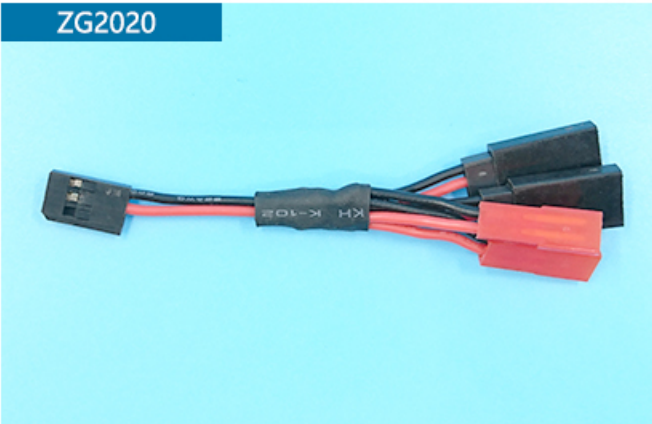

- 2020-1 75mm 24AWG RX Power Splitter Female Servo x 2, JST x 2
- 2020-2 75mm 26AWG RX Power Splitter Female Servo x 2, JST x 2
- 2020-3 150mm 24AWG RX Power Splitter Female Servo x 2, JST x 2
- 2020-4 150mm 24AWG RX Power Splitter Female Servo x 2, JST x 2


ZG2021

JR/male & JST/female switch

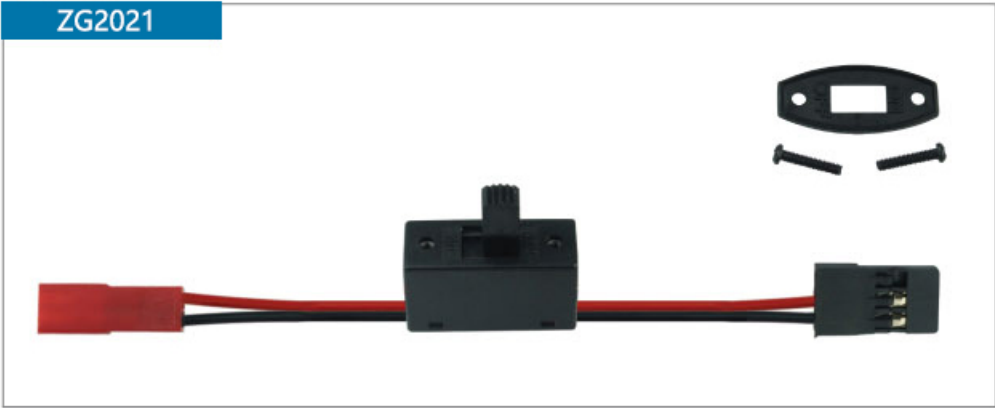

ZG2022

JST switch

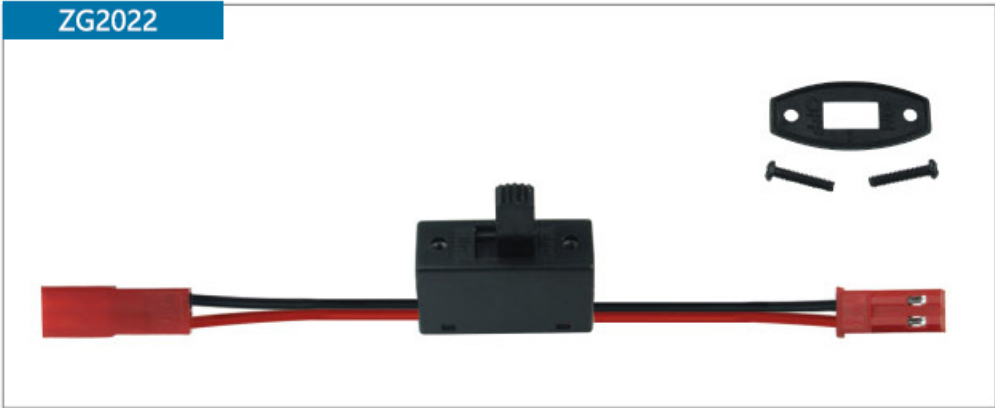


ZG2023

JR/Futaba switch




ZG2024

JR/Futaba switch

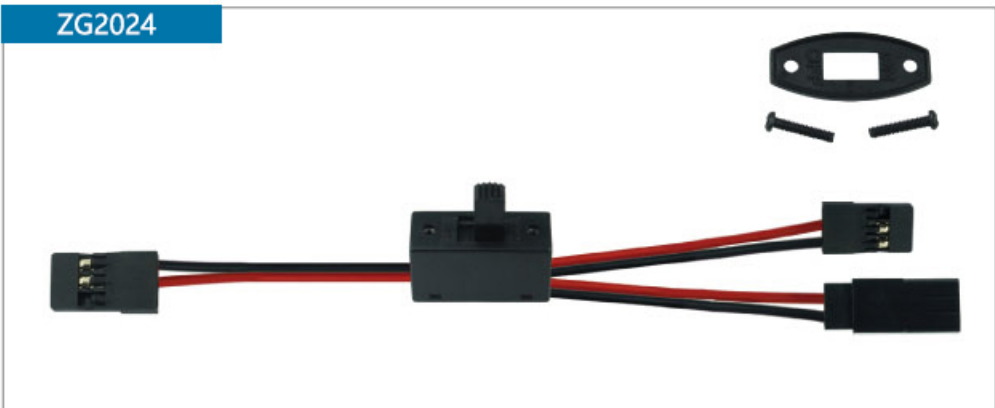


ZG2601

XH male connector
(female terminals) with PVC wire
(2S/3S/4S/5S/6S)

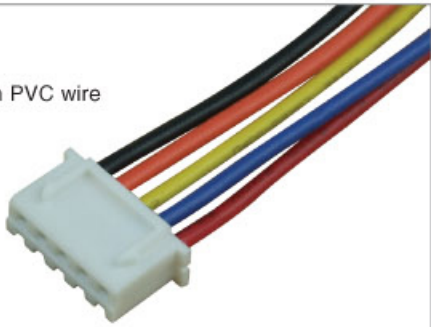

ZG2602

XH male connector
(female terminals) with PVC wire
(2S/3S/4S/5S/6S)

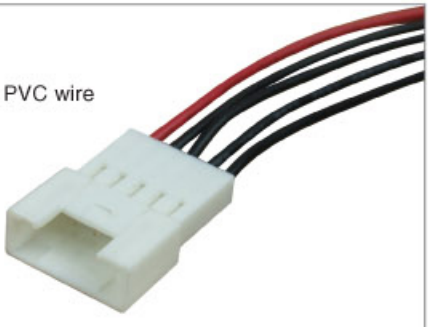

ZG2603

XH female connector
(male terminals) with PVC wire
(2S/3S/4S/5S/6S)




ZG2604

XH female connector
(male terminals) with PVC wire
(2S/3S/4S/5S/6S)




ZG2605

TP male connector
(female terminals) with PVC wire
(2S/3S/4S/5S/6S)

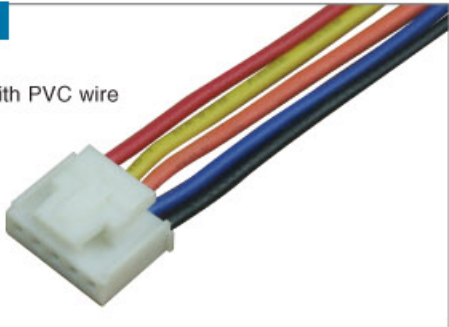

ZG2606

TP male connector
(female terminals) with PVC wire
(2S/3S/4S/5S/6S)

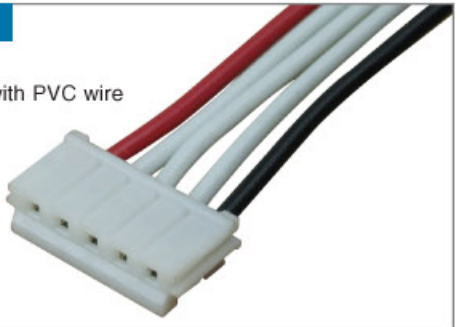

ZG2607

TP female connector
(male terminals) with PVC wire
(2S/3S/4S/5S/6S)



ZG2608

TP female connector
(male terminals) with PVC wire
(2S/3S/4S/5S/6S)




ZG2609

PQ male connector
(female terminals) with PVC wire
(2S/3S/4S/5S/6S)



ZG2610

XH female to double XH male
(5cm length)

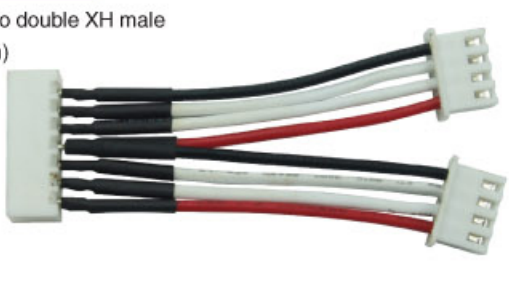

ZG2611

XH male to double XH female
(5cm length)



ZG2612

XH male to TP female adapter
(2S/3S/4S/5S)



ZG2613

XH male to double XH female
(5cm length)



ZG2614

EH male to XH female adapter
(2S/3S/4S/5S/6S)



ZG2615

XH extension leads (2S/3S/4S/5S/6S)



ZG2616

PQ male to XH female adapter
(2S/3S/4S/5S/6S)



ZG2617

XH male to EH female adapter
(2S/3S/4S/5S/6S)



ZG2618

EH extension leads (2S/3S/4S/5S/6S)



ZG2619

TP male to XH female adapter
(2S/3S/4S/5S)



ZG3001



JST charger leads
(22awg PVC wire 60cm)

ZG3002



JST charger leads
(20awg Silicone wire 30cm)

ZG3003



Futaba charger leads RX
(22awg PVC wire 60cm)

ZG3004



JR charger leads RX
(22awg PVC wire 60cm)

ZG3005



JR(2.1-) charger leads TX
(22awg PVC wire 60cm)

ZG3006



Futaba(2.5+) charger leads TX
(22awg PVC wire 60cm)

ZG3007



XT60 charger leads (14awg silicone wire 30cm)

ZG3008



Deans charger leads (16awg Silicone wire 30cm)

ZG3009



Deans charger leads (14awg Silicone wire 10cm)

ZG3010



Tamiya charger leads (16awg Silicone wire 30cm)

ZG3011



Tamiya charger leads (14awg Silicone wire 10cm)

ZG3012



TRX charger leads (16awg silicone wire 30cm)

ZG3013



3.5mm(W/housing) charger leads
(16awg Silicone wire 30cm)

ZG3014



4.0mm(W/housing) charger leads
(14awg Silicone wire 30cm)

ZG3015



Glow connector charger leads
(16AWG silicone wire 30cm)

ZG3016



5.5mm charger leads
(14awg Silicone wire 30cm)

ZG3017



EC3 charger leads
(16AWG silicone wire 30cm)

ZG3018



XT90 charger leads (14awg
silicone wire 30cm)

ZG3019




Female XT60 to Male High-Current TRX Connector (2S) with ID 2S XH balance plug

ZG3020




Female XT60 to Male High-Current TRX Connector (4S) with ID 4S XH balance plug

ZG3021

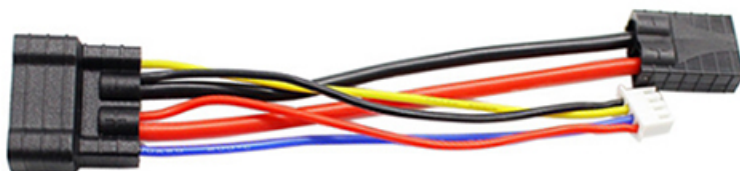

Female TRX to Male High-Current TRX Connector (2S) with ID 2S XH balance plug

ZG3022

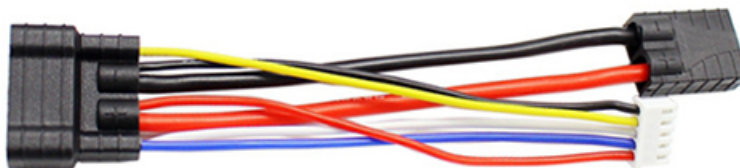


Female TRX to Male High-Current TRX Connector (3S) with ID 3S XH balance plug

ZG3023




4MM Banana Connector to Male High-Current TRX Connector (4S) with ID 4S XH balance plug

ZG3024

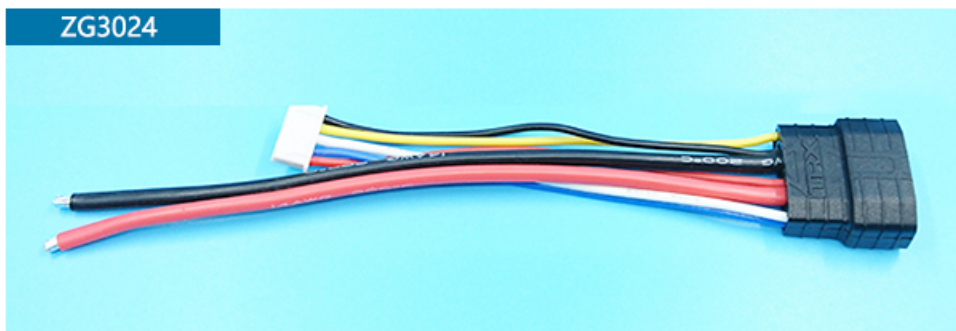


Pre-Tinned 4MM Positive/Negative Pin to Male High-Current TRX Connector (4S) with ID 4S XH balance plug

ZG3025

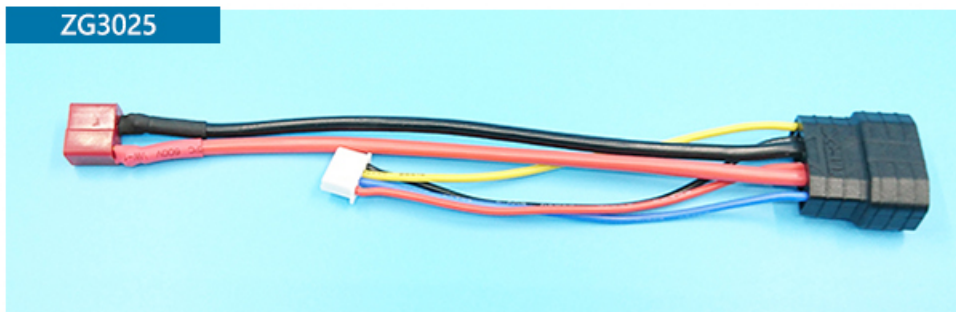


Female Dean to Male High-Current TRX Connector (3S) with ID 3S XH balance plug

ZG3026

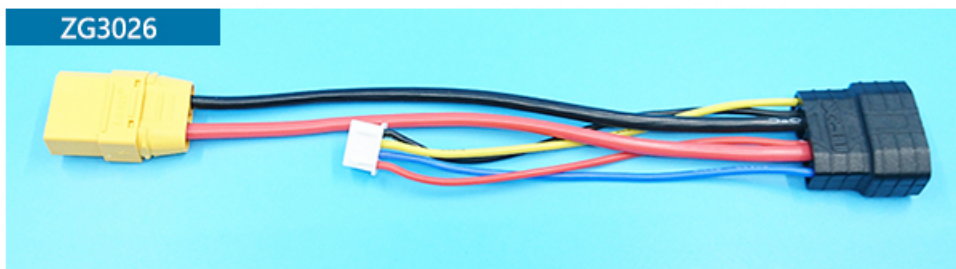


Female XT90 to Male High-Current TRX Connector (3S) with ID 3S XH balance plug

ZG3027

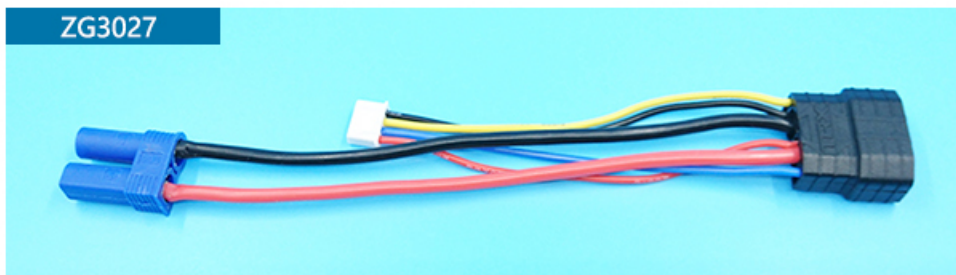

Female EC5 to Male High-Current TRX Connector (3S) with ID 3S XH balance plug

ZG3028

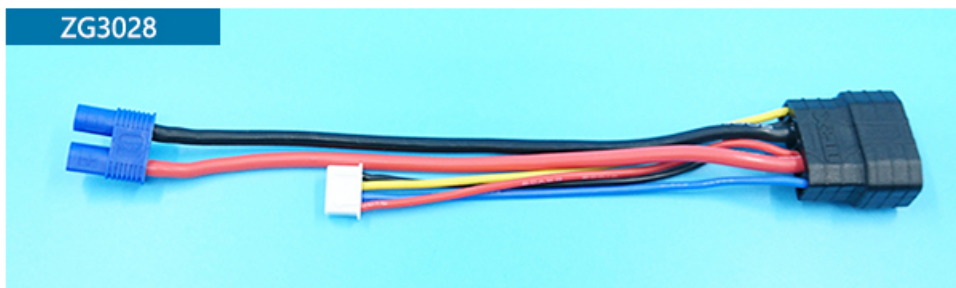

Female EC5 to Male High-Current TRX Connector (3S) with ID 3S XH balance plug

ZG3029

Deans Lipo charger lead




ZG3030

Tamiya Lipo charger lead



ZG3031

TRX Lipo charger lead

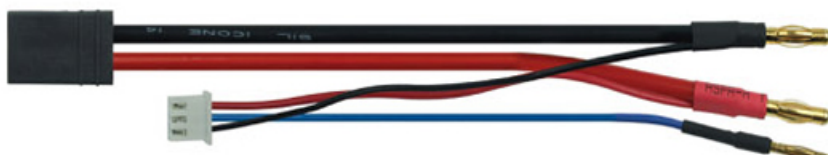


ZG3032

XT60 Lipo charger lead




ZG3033

F Deans to 4mm bullets with
2S XH balance plug 150MM

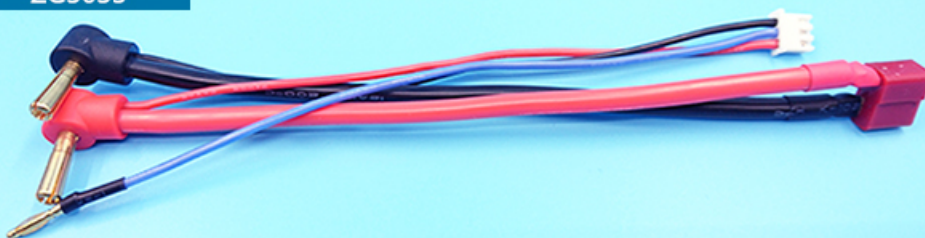


ZG3034

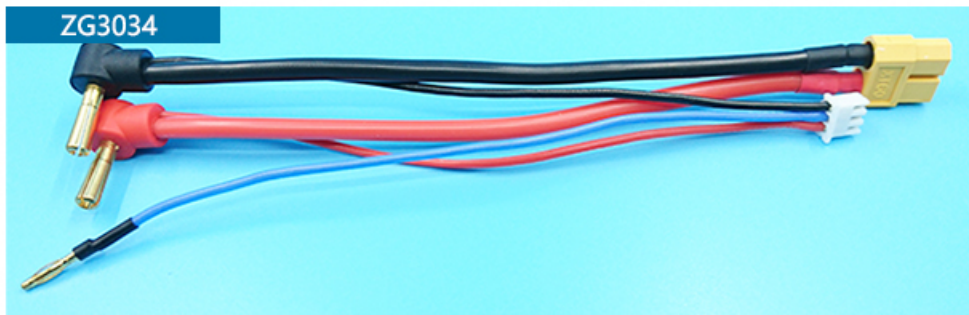


F XT60 to 4mm bullets with
2S XH balance plug 150MM

ZG3035

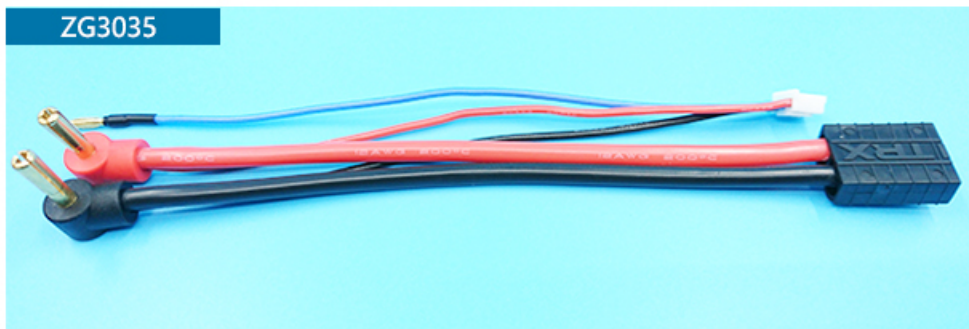


F TRX to 4mm bullets with
2S XH balance plug 150MM

ZG3036

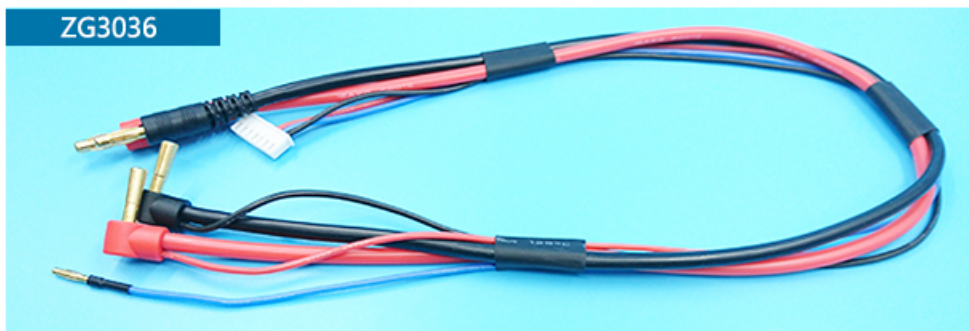


4MM to 4MM bullets with
2S XH balance plug 600MM

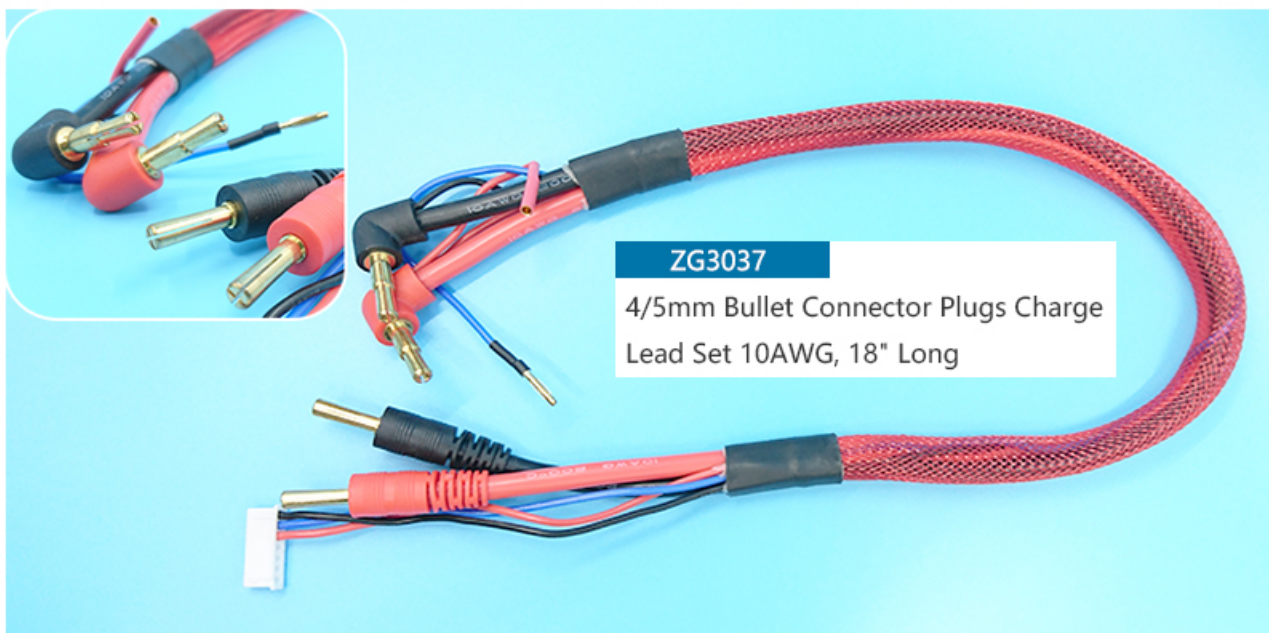

ZG3037


4/5mm Bullet Connector Plugs Charge
Lead Set 10AWG, 18" Long

ZG3038

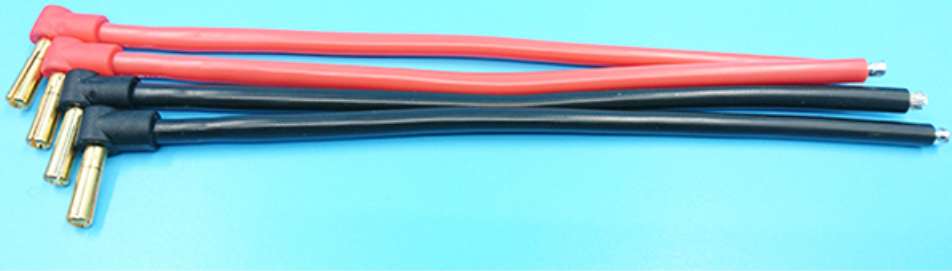


4mm bullets balance plug

ZG3039

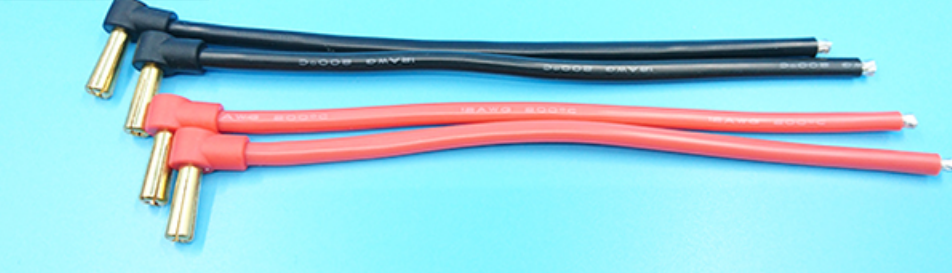


5mm bullets balance plug

ZG3040

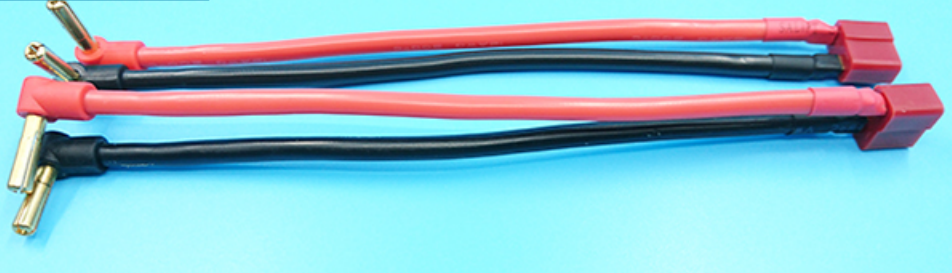


F Deans to 4mm bullets balance plug

ZG3041

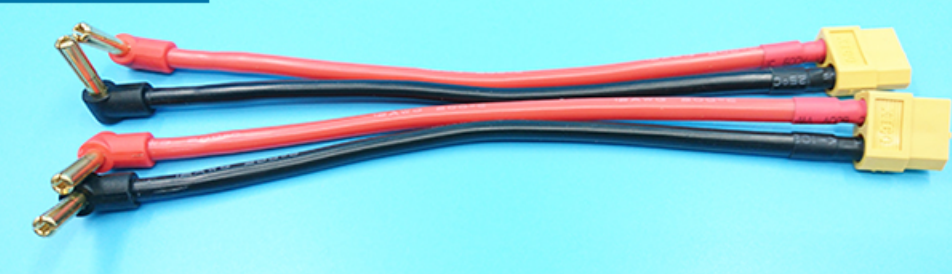

F XT60 to 4mm bullets balance plug

ZG3042

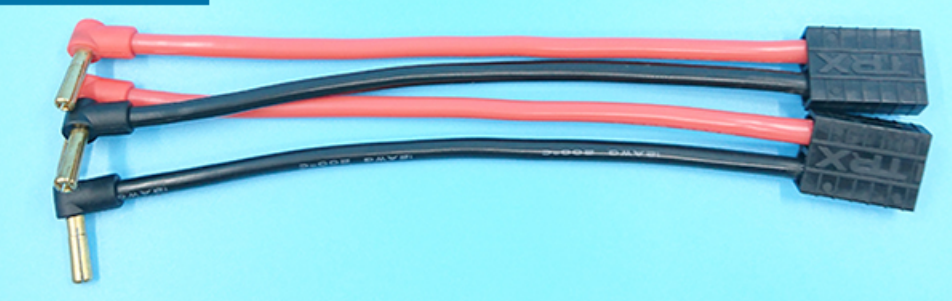


F TRX to 4mm bullets balance plug

ZG3301



Charger leads of Deans/Futaba/
JST/RX/TX/extra wire
(PVC wire)

ZG3302

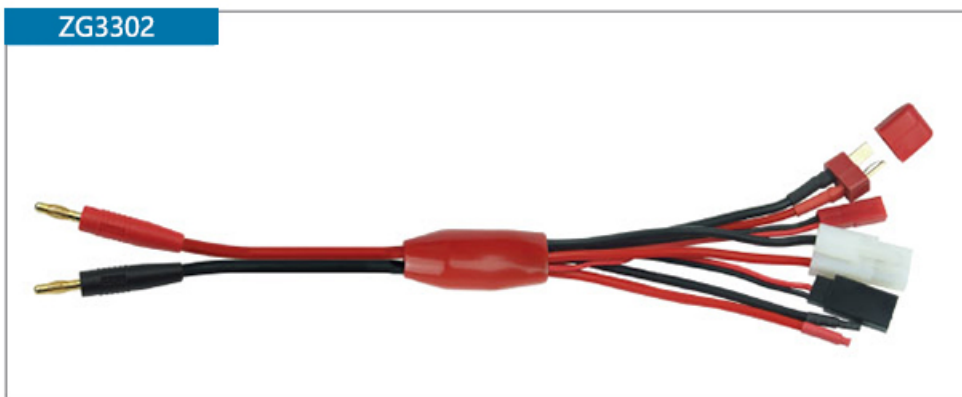


Charger leads of Deans/Futaba/
JST/Tamiya/extra wire
(18awg silicone wire)

ZG3303




Charger leads of Deans/MPX/
Tamiya/extra wire
(16awg silicone wire)

ZG3304

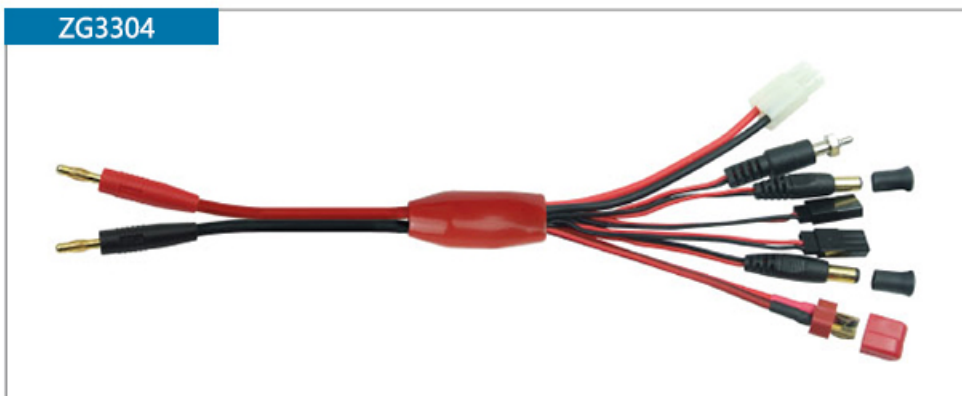


Charger leads of Glow/ Tamiya/
Deans/JRTX+RX and Futaba TX
+RX PVC wire

ZG3305

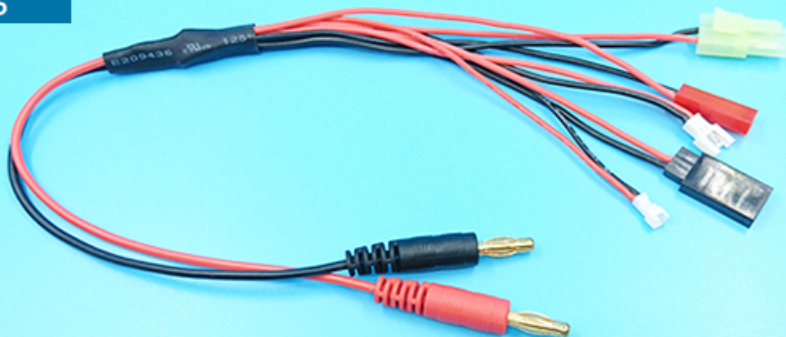


5-Function Mini/Micro Charge Adapter to M 4mm bullets

ZG3306

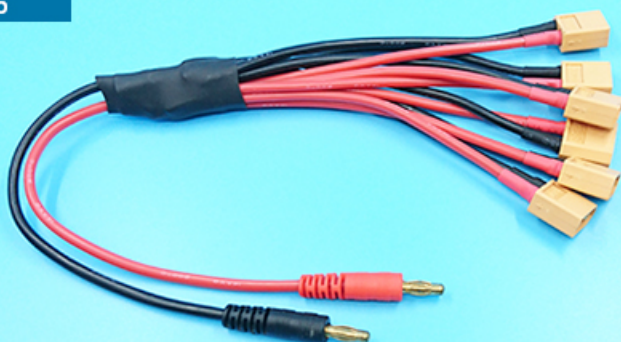


M XT60*6-Function Charge Adapter to M 4mm bullets-300mm wire

ZG3307

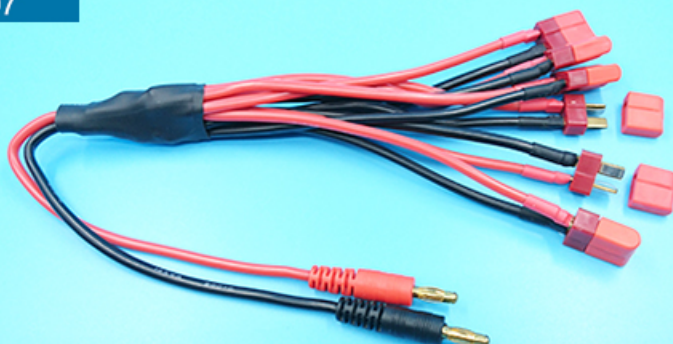

M Deans*6-Function Charge Adapter to M 4mm bullets-300mm wire

ZG3308

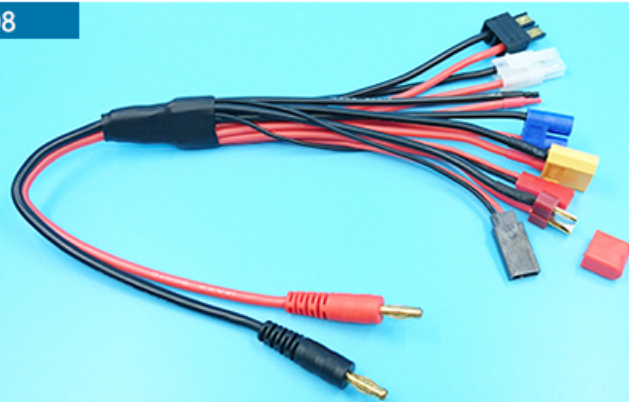


8-Function Charge Adapter to M 4mm bullets-300mm wire

ZG3309




4-Function Charge Adapter to
Male 4mm Bullets-300mm Wire

ZG3310

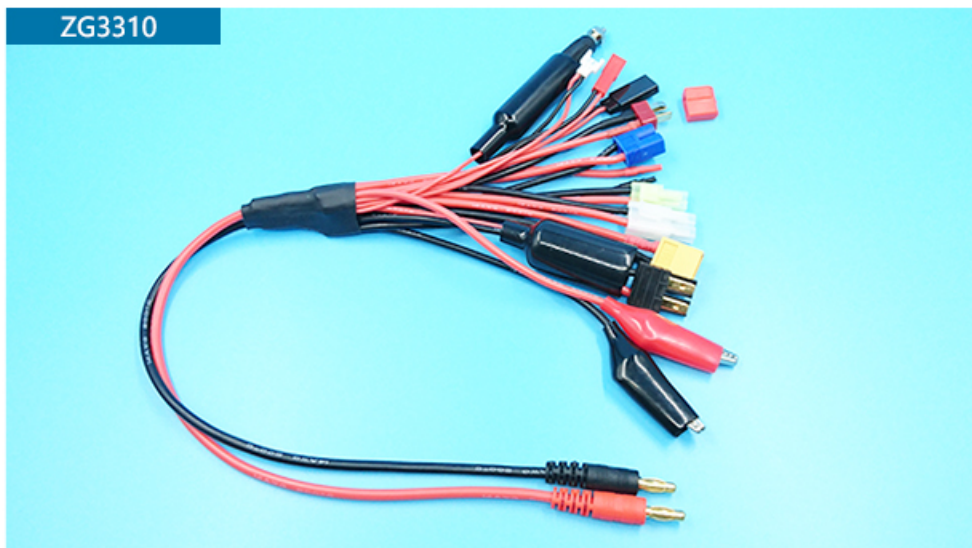

12-Function Charge Adapter to
Male 4mm Bullets-300mm Wire

ZG3311

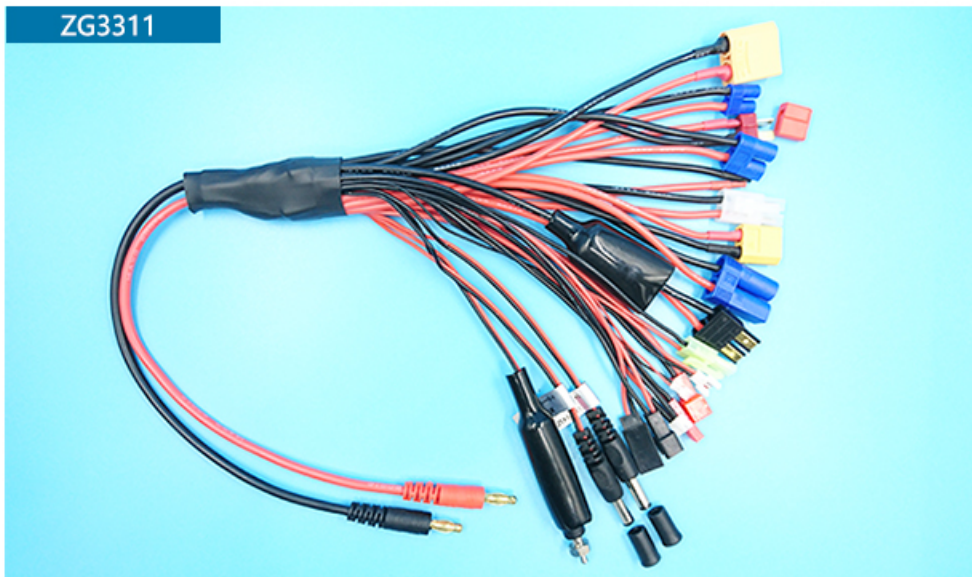

20-Function Charge Adapter to
Male 4mm Bullets-300mm Wire

ZG3401

JST female to Tamiya female adapter



ZG3402

JST extension leads



ZG3403

Futaba female to Tamiya female



ZG3404

Glow to Tamiya charger cable



ZG3405

JST male to Deans male adapter



ZG3406

Deans extension cable



ZG3407

JST female to Deans female adapter



ZG3408

Deans male to male adapter



ZG3409

JST female to JR or Futaba male adapter



ZG3410

EC3 Extension wire
(16awg silicone wire 10cm)



ZG3411

Tamiya female to Deans male adapter



ZG3412

TRX male to Tamiya female adapter



ZG3413

Tamiya male to Deans female adapter



ZG3414

TRX female to Tamiya male adapter



ZG3415

Deans male to Micro Tamiya female adapter



ZG3416

Deans male to TRX female adapter



ZG3417

Deans female to Micro Tamiya male adapter



ZG3418

TRX male to Deans female adapter



ZG3419

Tamiya female to Micro Tamiya male adapter



ZG3420

Deans male to EC3 female adapter



ZG3421

Deans female to EC3 male adapter



ZG3422

XT60 male to Tamiya female adapter



ZG3423

TRX male to EC3 female adapter



ZG3424

XT60 female to Tamiya male adapter



ZG3425

TRX female to EC3 male adapter



ZG3426

XT60 male to TRX female adapter



ZG3427

EC3 male to Tamiya female adapter



ZG3428

XT60 female to TRX male adapter



ZG3429

EC3 female to Tamiya male adapter



ZG3430

XT60 male to EC3 female adapter



ZG3431

XT60 female to EC3 male adapter



ZG3432

Serial harness for two batteries - Deans



ZG3433

XT60 male to Deans female adapter



ZG3434

Parallel Y leads - Deans



ZG3435

XT60 male to Deans male adapter



ZG3436

Serial harness for two batteries - Tamiya



ZG3437

Serial harness for two batteries - EC3



ZG3438

Parallel Y leads - Tamiya



ZG3439

Parallel Y leads - EC3



ZG340

Serial harness for two batteries - XT60



ZG3441

Parallel Y leads - XT60



ZG3442

Parallel Y leads - JST/BEC



ZG3443

Serial harness for two batteries - TRX



ZG3444

Parallel Y leads - TRX



ZG3445

Female XT90 to Male TRX Charge Lead 12AWG L=200MM Wire



ZG3446

Female XT90 to Male XT60 Charge Lead 12AWG L=200MM Wire



ZG3447

Female XT90 to Male Dean Charge Lead 12AWG L=200MM Wire





ZG3801
3.5mm w/leads
16awg 10cm



ZG3802
Male micro Tamiya
w/leads 18awg 10cm



ZG3803
4.0mm w/leads
14awg 10cm



ZG3804
Female Tamiya
w/leads 14awg 10cm



ZG3805
Female micro Tamiya
w/leads 18awg 10cm



ZG3806
Male Tamiya
w/leads 14awg 10cm



ZG3807
Male connector
w/leads 16awg 10cm



ZG3808
Female connector
w/leads 16awg 10cm



ZG3809
3.5mm symmetrical
connector
w/leads 10cm



ZG3810
3.5mm symmetrical
connector
w/leads 10cm




ZG3811
Female AMP
w/leads 16awg 10cm



ZG3812
Male black connector
w/leads 20awg 10cm



ZG3813
Male AMP connector
w/leads 16awg 10cm

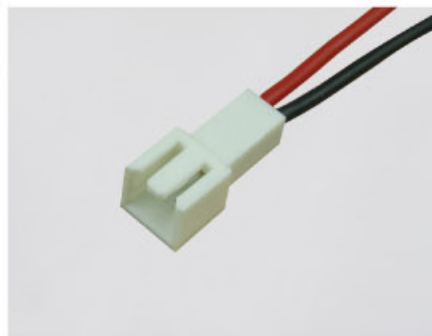

ZG3814
Female connector
w/leads 20awg 10cm



ZG3815
Female JST/BEC
w/leads 20awg 10cm



ZG3816
Male connector
w/leads 20awg 10cm




ZG3817
Male JST / BEL
w/leads 20awg 10cm



ZG3818
Female Deans
w/leads 14awg 10cm



ZG3819
Female black connector
w/leads 20awg 10cm

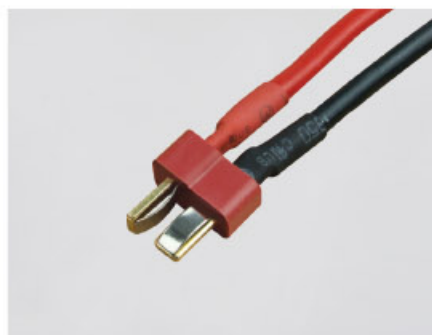

ZG3820
Male Deans
w/leads 14awg 10cm



ZG3821

3.5mm connector
w/leads 14awg 10cm



ZG3822

Male TRX
w/leads 14awg 10cm



ZG3823

3.5mm connector
w/leads 14awg 10cm



ZG3824

Male EC3
w/leads 14awg 10cm



ZG3825

Female MPX
w/leads 14awg 10cm



ZG3826

Female EC3
w/leads 14awg 10cm



ZG3827

Male MPX
w/leads 20awg 10cm



ZG3828

Male XT60
w/leads 12awg 10cm



ZG3829

Female TRX
w/leads 14awg 10cm



ZG3830

Female XT60
w/leads 12awg 10cm

ZG4101

Red / Black / White / Yellow / Blue

8AWG super soft silicone wire, 100M/roll

10AWG super soft silicone wire, 100M/roll

12AWG super soft silicone wire, 200M/roll

14AWG super soft silicone wire, 200M/roll

16AWG super soft silicone wire, 200M/roll

18AWG super soft silicone wire, 200M/roll

20AWG super soft silicone wire, 200M/roll

22AWG super soft silicone wire, 400M/roll

24AWG super soft silicone wire, 400M/roll

26AWG super soft silicone wire, 400M/roll


28AWG super soft silicone wire, 1000M/roll

30AWG super soft silicone wire, 1000M/roll

8AWG

1650/0.08
Tinnde Copper-60℃~+200℃
TEMP Rang

Silicon Wire

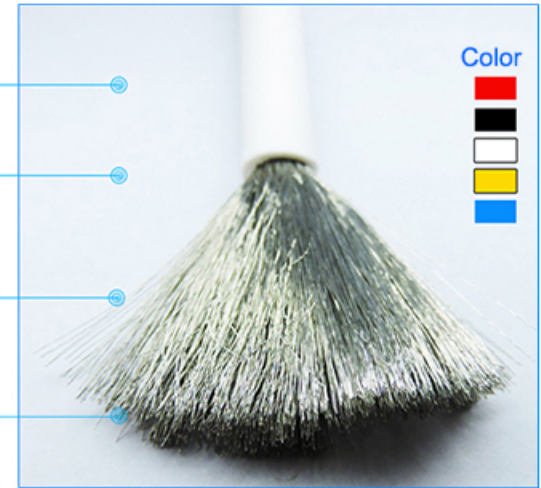

Silicone Wire Specification table

Nominal voltage: 600V		Temperature rang: -60℃~+200℃			Conductor: Tinnde copper		Insulator: PVC	
Conductor			Insulator		Rical character	Sectional area	Max.Current	Package
DWG	NO.X / OD (mm)	Diameter (mm)	Plastic thick(mm)	Over Diameter (mm)	Realst max cuc, c20° ohm/kft	mm²	Ampere (A)	Packing Mt /coils
30	11/0.08	0.30	0.55	1.20	331.00	0.05	0.80	1000
28	16/0.08	0.36	0.55	1.30	227.20	0.08	1.25	1000
26	30/0.08	0.46	0.55	1.50	123.00	0.14	3.50	400
24	40/0.08	0.61	0.55	1.60	97.60	0.20	5.00	400
22	60/0.08	0.78	0.55	1.70	88.60	0.33	8.73	400
20	100/0.08	0.92	0.55	1.80	62.50	0.50	13.87	200
18	150/0.08	1.19	0.55	2.30	39.50	0.75	22.00	200
16	252/0.08	1.53	0.80	3.00	24.40	1.27	35.00	200
15	336/0.08	1.69	0.80	3.10	20.02	1.68	42.00	200
14	400/0.08	1.78	0.90	3.50	15.60	2.07	55.60	200
13	500/0.08	2.06	0.95	4.00	12.50	2.50	65.00	200
12	680/0.08	2.48	1.00	4.50	9.80	3.40	88.40	200
11	788/0.08	2.59	1.00	4.60	7.38	3.96	100.0	100
10	1050/0.08	3.06	1.00	5.00	6.30	5.30	140.6	100
8	1650/0.08	3.75	1.50	6.80	4.20	8.29	200	100

ZG4401

Gray / Orange / White / Red / Violet / Black / Blue / Yellow / Green / Brown / Double color

10 AWG UL1015 wire, 290M/roll

12 AWG UL1015 wire, 290M/roll

14 AWG UL1015 wire, 290M/roll

16 AWG UL1015 wire, 290M/roll

18 AWG UL1015 wire, 590M/roll

20 AWG UL1015 wire, 590M/roll

22 AWG UL1015 wire, 590M/roll

24 AWG UL1015 wire, 590M/roll



11 color for available option

UL1015 Wire Specification table

Nominal voltage: 600V			Nominal Temperature: 105°C			Conductor: Tinnde copper	Insulator: PVC
Conductor			Insulator			Rical character	Package
DWG	NO.X / OD (mm)	Diameter (mm)	Ave. thick(mm)	Min. thick(mm)	Nom.Diameter (mm)	Realst max cuc, c20° ohm/kft	Packing Mt /coils
24	7/0.203	0.61	0.77	0.69	2.19	87.6	590
22	17/0.16	0.76	0.77	0.69	2.34	55.4	590
20	21/0.18	0.95	0.77	0.69	2.52	34.4	590
18	32/0.18	1.18	0.77	0.69	2.76	21.9	590
16	26/0.254	1.49	0.77	0.69	3.07	13.7	290
14	41/0.254	1.88	0.77	0.69	3.46	8.6	290
12	65/0.254	2.36	0.77	0.69	3.94	5.41	290
10	105/0.254	3.00	0.77	0.69	5.1	3.41	290

ZG4601

Brown/Red/Orange

Twisted PVC wire 26AWG (0.08*30,OD1.2mm),500m/roll

Twisted PVC wire 22AWG (0.08*60,OD1.4mm),500m/roll



ZG4701

Black/Red/White

Twisted PVC wire 26AWG (0.08*30,OD1.2mm) , 500m/roll

Twisted PVC wire 22AWG (0.08*60,OD1.4mm), 500m/roll



ZG4801

Black/Red/White

Flat PVC wire 26AWG (0.08*30,OD1.2mm),500m/roll

Flat PVC wire 22AWG (0.08*60,OD1.4mm),500m/roll



ZG4901

Brown/Red/Orange

Flat PVC wire 26AWG (0.08*30,OD1.2mm),500m/roll

Flat PVC wire 22AWG (0.08*60,OD1.4mm),500m/roll



Servo Wires Specification table

Nominal voltage: 300V					Temperature rang: -30°C+80°C		Conductor: Tinnde copper	Iusulator: PVC		
Conductor					Iusulator		Rical character	Max.Current	Package	
DWG	Color	Flat/twisted	NO.X / OD (mm)	Diameter (mm)	Plastic thick(mm)	Over Diameter (mm)	Realst max cuc, c20° ohm/kft	Ampere (A)	Packing Mt /coils	
28	BK/RD/WH	Flat	20/0.08	0.32	0.41	1.0	72	0.80	500	
	BN/RD/OQ		20/0.08							
	BK/RD/WH	Twisted	20/0.08							
	BN/RD/OQ		20/0.08							
26	BK/RD/WH	Flat	30/0.08	0.48		1.20	45.20	1.40		500
	BN/RD/OQ		30/0.08							
	BK/RD/WH	Twisted	30/0.08							
	BN/RD/OQ		30/0.08							
22	BK/RD/WH	Flat	60/0.08	0.72		1.4	16.70	3.40		500
	BN/RD/OQ		60/0.08							
	BK/RD/WH	Twisted	60/0.08							
	BN/RD/OQ		60/0.08							

ZG5101 LiPo Safety Sack

LiPo Safety Sack (150mmx110mm)

LiPo Safety Sack (220mmx180mm)

LiPo Safety Sack (300mmx220mm)

Capable of customize what you want

Material: Glass fiber fabric+Nonwoven fabric
+Polyvinyl chloride



ZGH5201 LiPo Safety Briefcase

LiPo Safety Briefcase 240*180*65MM

Capable of customize what you want

Material: Glass fiber fabric+Nonwoven fabric
+Polyvinyl chloride



ZG5301 Lipo Safety Storage Bag

2S Lipo Safety Storage Bag

Lipo Safety Bag (up to 6S)

Capable of customize what you want

Material: Glass fiber fabric+Nonwoven fabric
+Polyvinyl chloride




ZG5401 Fireproof / waterproof

Fireproof Lipo bags / Waterproof safe bag

Capable of customize what you want

Material: Silicone glass fiber+Insulation cotton
+Insulation aluminum foil

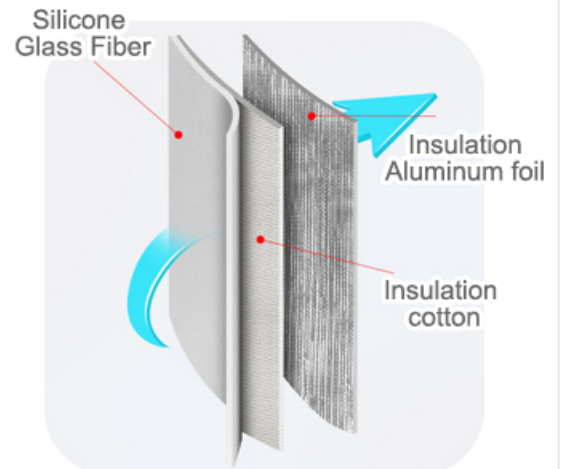

ZG6000

Body clips

Material: Stainless steel 304

Color: Electroplated silver


Package: PE bag + headcard

1/12 Body clips
size: \varnothing 1.0*19MM


ZG6001

1/10 Truck body clips
size: \varnothing 1.4*28MM

ZG6002

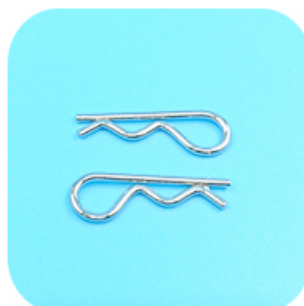1/10 Body clips
size: \varnothing 1.4*25MM

ZG6003

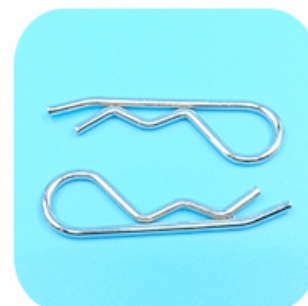1/8 Body clips
size: \varnothing 1.6*38MM

ZG6004

ZG6015

Direct short plug

ZG6015-1 XT90 direct short plug 12AWG L=60MM

ZG6015-2 EC3 direct short plug 12AWG L=60MM

ZG6015-3 TRX direct short plug 12AWG L=60MM

ZG6015-4 XT60 direct short plug 12AWG L=60MM

ZG6015-5 Deans direct short plug 12AWG L=60MM




ZG6701

Power capacitor

Capacitor: 10V 2200uf

Silicone Wire: JR 22AWG 60MM

Capable of customize what you want

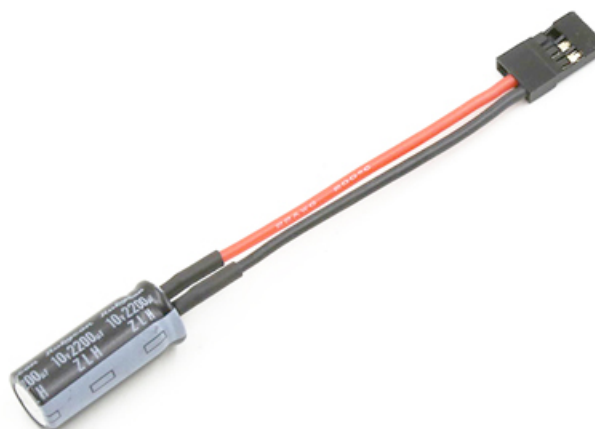

ZG6020

Shrink Tube 270PCS

Color: Black /Red

Diameter: 1.6/2.4/3.2/3/4.8/6.4/9.5

Length: 45MM

Total Quantity: 270PCS



Shrink Tube Specification table

Diameter	1.6mm	2.4mm	3.2mm	4.8mm	6.4mm	9.5mm
Black Qty	35	40	40	10	6	4
Red Qty	35	40	40	10	6	4
Length	45	45	45	90	90	90

ZG6030

Shrink Tube 560PCS

Color: Black / Yellow / Red / Blue / Green

Diameter: 1/1.5/2/2.5/3.5/4/4/5/6/7/10/13

Length: 45MM

Total Quantity: 560PCS



Shrink Tube Specification table

Diameter	1.0mm	1.5mm	2.0mm	2.5mm	3.5mm	4.0mm	4.0mm	5.0mm	6.0mm	7.0mm	10.0mm	13.0mm
Color	black	Red	yellow	blue	green	Red	Red	blue	blue	Red	black	black
Quantity	90	70	70	50	50	50	50	30	30	25	25	20
Length	45	45	45	45	45	45	45	45	45	45	45	45

ZG6040

Shrink Tube 780PCS

Color: Black / Yellow / Red / Blue

Diameter: 1/1.5/2/2.5/3/3.5/4/5/6/8/10/14

Length: 45MM

Total Quantity: 780PCS



Shrink Tube Specification table

Diameter	1.0mm	1.5mm	2.0mm	2.5mm	3.0mm	3.5mm	4.0mm	5.0mm	6.0mm	8.0mm	10.0mm	14.0mm
Color	black	yellow	Red	blue	yellow	black	Red	yellow	Red	blue	black	black
Quantity	200	130	80	80	60	50	40	30	20	40	30	20
Length	45	45	45	45	45	45	45	45	45	45	45	45


ZG6521

8 kinds of carving knife

Types: 21#, 17#, 2#, 19#, 20#, 11#, 7#, 12#

Material: SK5

Package: 5pcs/box、10pcs/box、Pebag

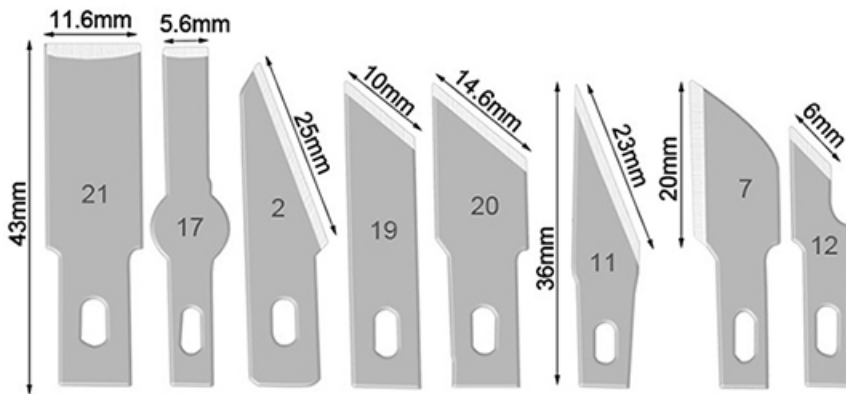

ZG6522

Silver / blue / golden / gules / green / violet

Singal aluminum carving knife

Material: 65# Manganese steel

Weight:38g

Package: PE bag + headcard、Plastic box




ZG6523

13pcs knife+ 3pcs handle carving knife set

Types: 21#, 17#, 2#, 19#, 20#, 11#*2, 7#*2, 12#

Material: 65# Manganese steel

Weight:127g

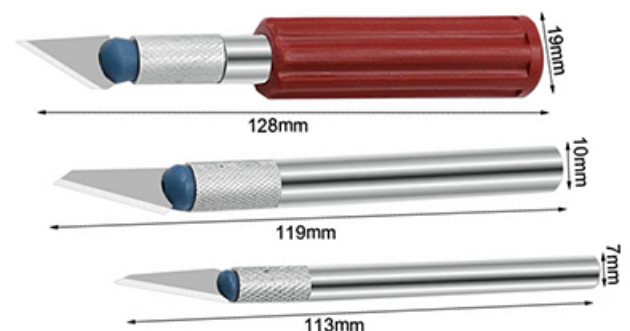

ZG6541

Hook And Loop Battery Straps

Width: 1.6cm / 2.0cm / 2.5cm

Material: Nylon

Capable of customize what you want



Hook And Loop Battery Straps Specification table

Width	1.6cm					2.0cm						2.5cm					
length	15cm	20cm	30cm	45cm	60cm	15cm	20cm	30cm	45cm	50cm	60cm	15cm	20cm	30cm	45cm	60cm	

ZG6551

JR 、 Futaba Lanyard / Strap

Color: Black / yello

Material: Nylon

Package: PE bag + headcard



ZG6561

3M Double Sided Adhesive Foam Tape

Material: double sided rubber foam

Package: PE bag + headcard

Capable of customize what you want




ZG6130

**Waterproof Heat Shrink Butt
Terminals Solder Seal Sleeve Wire Connectors**

Temperature: -55°C ~ +125°C

Suitable Wire: 26AWG-10AWG

Package: PE bag + headcard, Plastic box

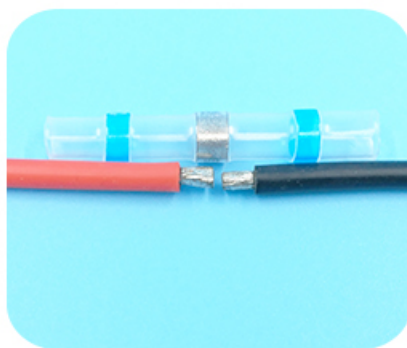**Waterproof Heat Shrink Butt Terminals Solder Seal Sleeve Wire Connectors**

Operating temperature: -55°C ~ +125°C			Shrink temperature: 80°C		Tin melting temperature: 138°C		
Protection level: IP67			Dielectric strength: 1kv		Tin complete melting temperature: 160°C		
Qty/box	50pcs/box	100pcs/box	120pcs/box	150pcs/box	200pcs/box	250pcs/box	Suitable Wire
White	10	25	30	40	40	40	26AWG-24AWG
Blue	12	30	40	50	60	90	22AWG-18AWG
Red	23	35	40	50	80	100	16AWG-14AWG
Yellow	5	10	10	10	20	20	12AWG-10AWG

ZG6150

Nylon braided mesh tube

Diameter: 3mm-60mm

Color: black / blue / Red

Temperature: -60°C ~ +125°C



ZG6160

Wire nuts



Material: PP / Spring steel

Suitable Wire: 22AWG-10AWG

Package: PE bag + headcard、Plastic box

Wire nuts Specification table

Color	Grey	Bule	Orange	Yello	Red
Quantity	40pcs	40pcs	50pcs	18pcs	10pcs
Min.AWG	2*22AWG	2*20AWG	2*18AWG	2*16AWG	2*14AWG
Max.AWG	2*18AWG	2*16AWG	2*14AWG	2*12AWG	2*10AWG


ZG6180

60pcs Wire Connector T Tap Terminal Clip

Material: PA66/Stainless steel、PC/Copper

Suitable Wire: 20AWG-12AWG

Package: PE bag + headcard、Plastic box



Scotch Lock Quick Splice Wire Connector T Tap Terminal Clip

Plastic box	Quantity	Color	Material	Suitable Wire
60PCS	10 + 10pcs	Red / Red	PA66/Stainless steel、PC/Copper	20AWG-18AWG
	10 + 10pcs	Blue / Blue	PA66/Stainless steel、PC/Copper	18AWG-14AWG
	10 + 10pcs	Yellow / Yellow	PA66/Stainless steel、PC/Copper	14AWG-12AWG

Package: 60pcs/120pcs/240pcs/360pcs/480pcs Boxed or Custom Quantity

ZG6200

Nylon cable tie

Width: 3.0mm / 4.0mm / 5.0mm / 8.0mm

Material: PA66


Package: PE bag + headcard



Nylon cable tie Specification table

Width	3.0mm			4.0mm			5.0mm			8.0mm		
Length	100mm	150mm	200mm	150mm	200mm	300mm	150mm	300mm	450mm	200mm	300mm	450mm
Max.Pull	8kg			18kg			22kg			55kg		

ZG6707

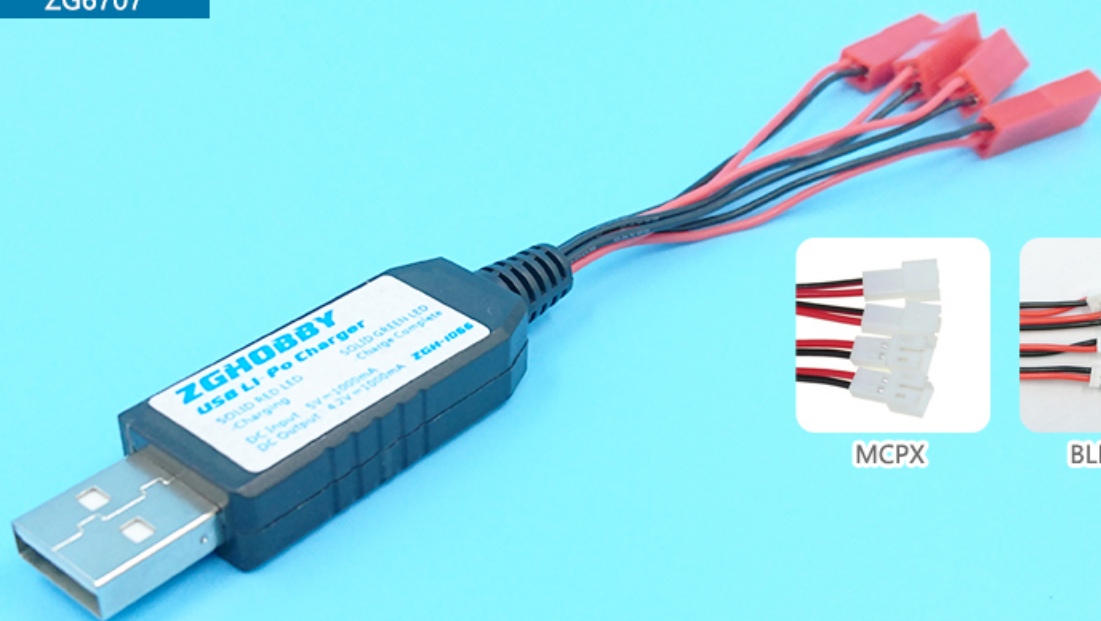

MCPX



BLH/EFL



Hubsan

USB Charger for 1S (3.7V) batteries JST x 4

USB Charger for 1S (3.7V) batteries JST x 4, 20AWG 100MM

Charging: Solid Red LED Charge Complete: Solid Green LED

DC Input: 5V..._1000mA DC Output: 4.2V..._1000mA

ZG6707-1 USB Charger for JST x 4

ZG6707-2 USB Charger for MCPX x 4

ZG6707-3 USB Charger for BLH/EFL x 4

ZG6707-4 USB Charger for Hubsan x 4


ZG6708

Temperature sensor wire

Induction temperature: 0°C ~ 80°C

Length: 45cm

Package: PE bag + headcard

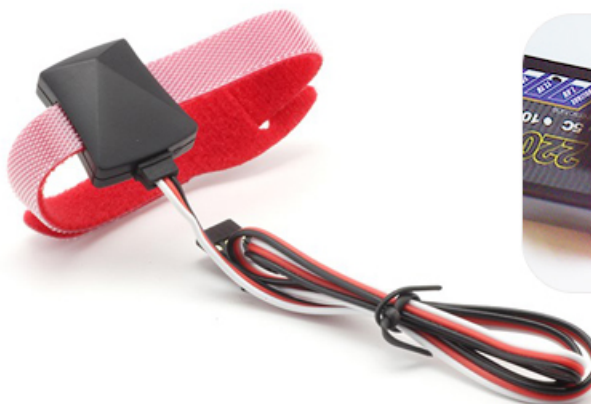

ZG6709

Lipo battery voltage tester Low voltage buzzer alarm

Use for 1-8S Lipo/Li-on/Li-mn/Li-fe

Total voltage display rang: 0.5-36V

1S test mode voltage rang: 3.7-30V

Low voltage alarm mode for 2-8s




ZG6706

3.7V/4.2V、3.8V/4.35V Lipo battery charger

USB Input range: 5V±5% 0.5~2A

Voltage output range: 2.5~4.35V

Current output range : 600mA*6

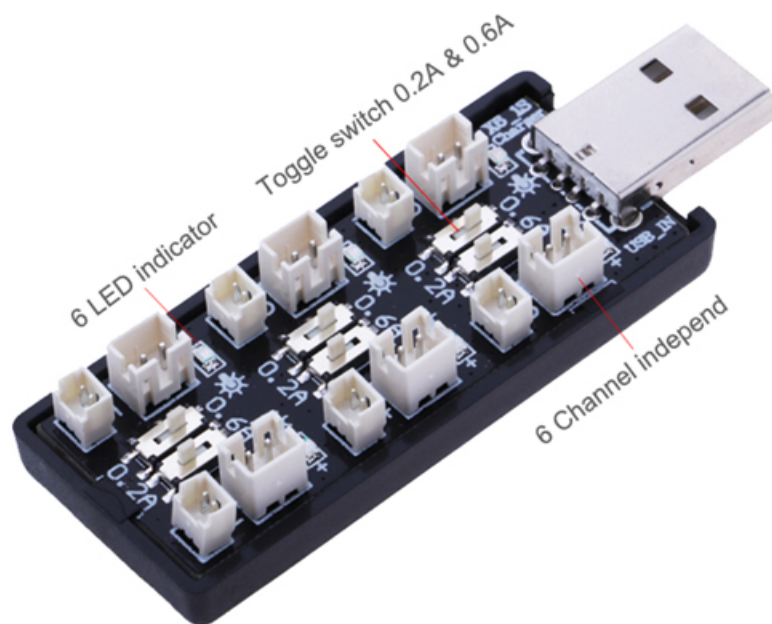



ZG6710

XT30-XT60

Fuse anti-short-circuit protector

Input voltage 2-6S

Only for one battery in once, not allow for two at the same time.

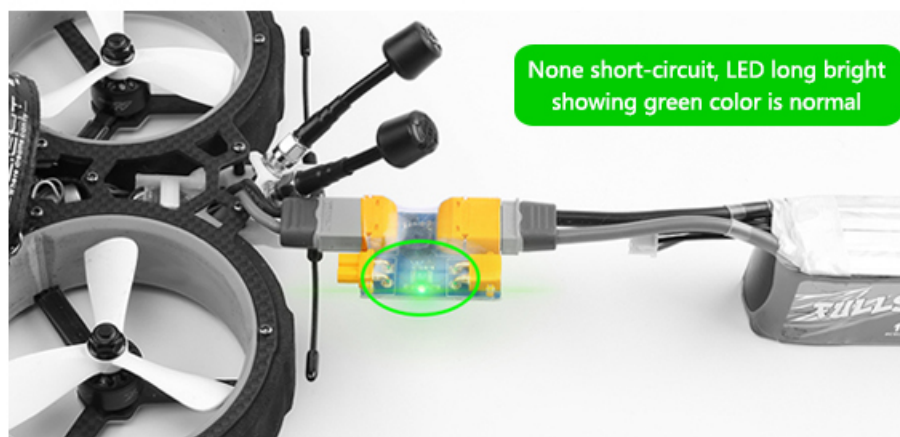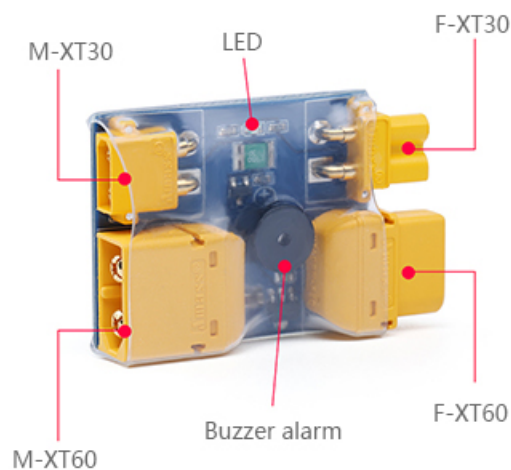



ZG6703

Dean, XT60 parallel board

2-6S XH balance charger board

Acceptable to charging 6 battery at the same time

Package: PE bag + headcard

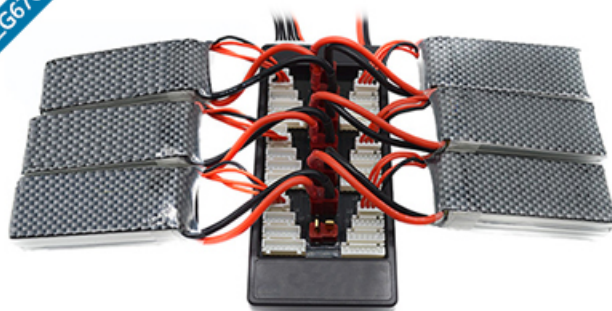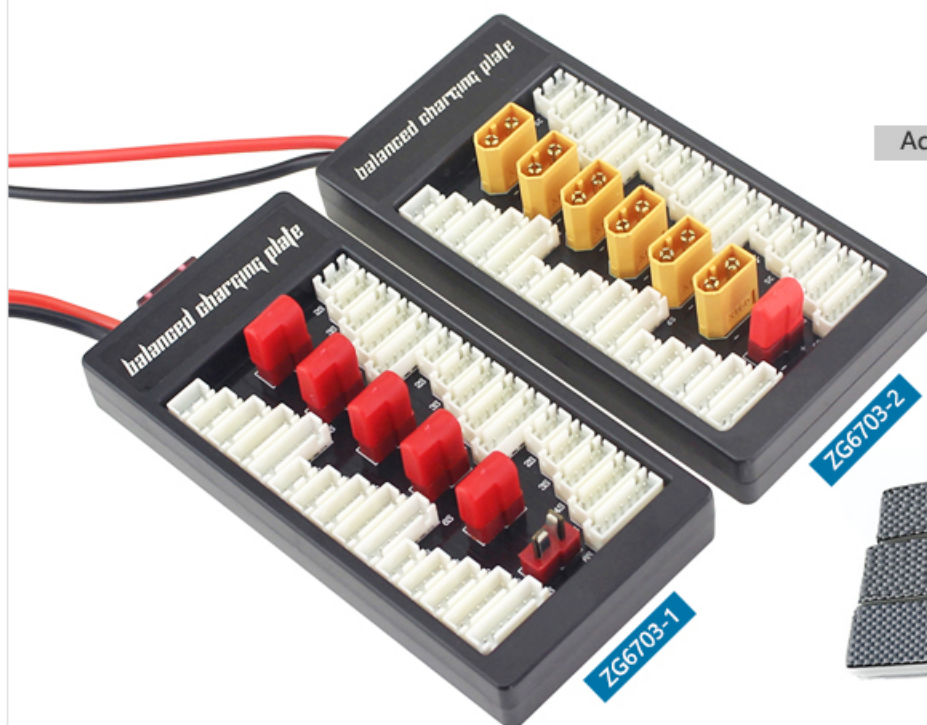

ZG6704

Multiple balance charger board

Apply to: 2-6S (7.4-22.2V)

Balance Plug type: TP/HP/XH/EH

Note: can only connect the same type of plug charging at a time, do not connect multiple types of plug charging.

Package: PE bag + headcard




ZG6705

2-6S XH balance charger board

Apply to: 2-6S (7.4-22.2V)

Balance Plug type: JST-XH TP/FP 2S-6S

Package: PE bag + headcard

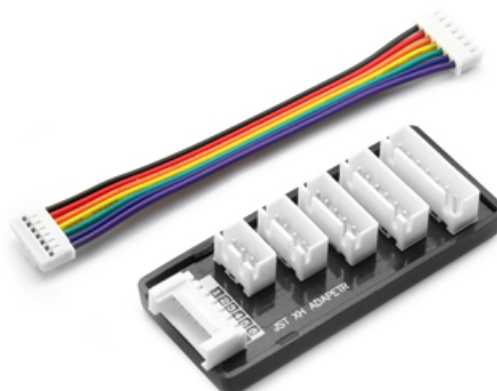

ZG6501

Commemorative coins

Surface treatment : Enchase/Baking paint/Electroplating/UV

Thickness: 3mm/4mm/5mm/6mm

Material: Alloy/Copper/Silver

Package: OPP bag/PMMA box/Customize



ZG6601

Peaked cap

Material: cotton, mesh, quick-drying fabric

Head circumference size: adjustable

Color options: red, blue, black, white, gray

Logo customise: embroidery, printing

